


Dimensions

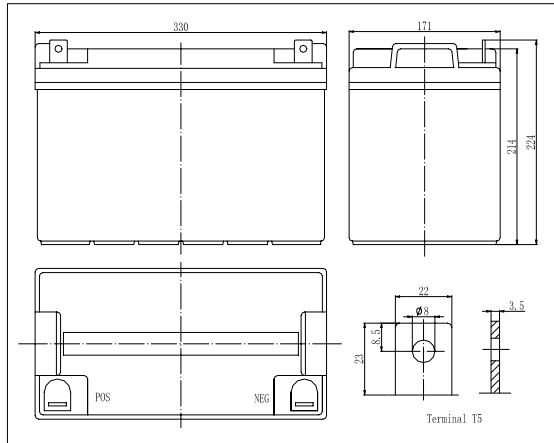


Specifications


Nominal Voltage		12 V
Capacity(10HR, 25°C)		100 Ah
Dimension	Length	330mm (12.99inch)
	Width	171mm (6.73inch)
	Height	214mm (8.43inch)
	Total Height	224mm (8.82inch)
Approx. Weight		32kg (70.6lbs)
Internal resistance (Fully charged, 25°C)		Approx.4.5m Ω
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range		-15°C ~ 50°C (5°F ~ 122°F)
Float charging voltage(25°C)		13.38 to 13.80V
Cyclic charging voltage(25°C)		14.40 to 15.900V
Maximum charging current		30A
Terminal material		Copper
Maximum discharge current		800A(5 sec.)

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ Flame retardant ABS container (UL94V-0 / 94 V-2)

Charging Characteristics(25°C)

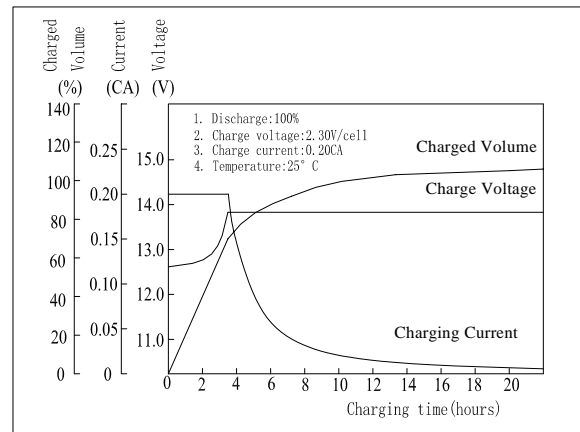

Cycle Life(25°C)

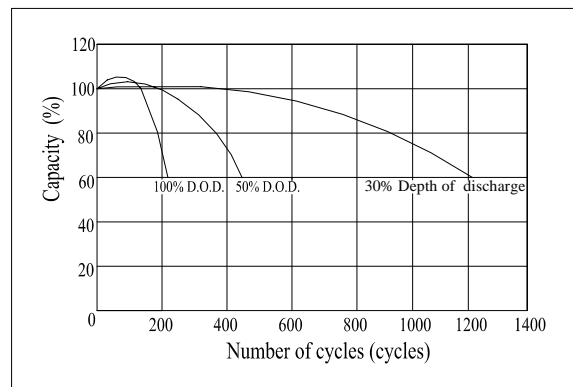

Note: Floating life designed for 10 years at 25°C

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	320	220	175	108	65.0	36.5	26.4	18.5	12.2	10.3	5.35
10.2V	304	209	168	104	62.4	36.0	26.0	18.2	12.1	10.2	5.35
10.8V	286	196	160	98.8	59.3	35.3	25.5	17.8	12.0	10.0	5.30

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	3360	2376	1922	1212	741	423	310	219	146	123	64.2
10.2V	3192	2257	1845	1167	711	417	306	215	145	122	64.2
10.8V	3003	2117	1757	1109	676	409	300	210	144	119	63.6